



**BEAUTIFUL  
CEILINGS WITH  
HENCO**





The core of Henco india gypsum is the pursuit to understand what goes on within our communities and how the shape and render their spaces in order to develop cost-efficient green solutions that can enrich and modernize the building culture.


Henco india gypsum is further committed to developing strong customer relationship management. with dedicated sales, marketing, technical support, and logistics teams that focus on the delivery of top quality customer service.

The strong backbone behind Henco india gypsum products is high-purity 100% natural gypsum. products are further developed with the environment in mind. Henco products are recyclable, sustainable and not hazardous to nature humans.





**TO CREATE THE BEST QUALITY  
PRODUCTS FOR PEOPLE'S NEED  
AND MAINTAIN THE QUALITY THAT  
THEY DEMAND**

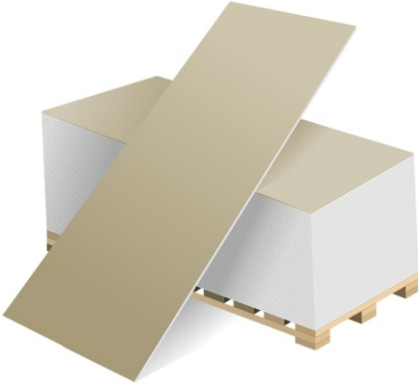


At Henco India Gypsum, We Strive To Reach New Heights Constantly. Since Inception, We Have Been Focused On Evolving Trends In The Industry And Keep Our Clients Ahead Of Time As Well. We Pride Ourselves In Being One Of The Best Board Industry And Aim To Remain So.

**VISION**

We Aspire To Become A Global Leader In The Plaster Board Sector By Providing Top Quality Plaster Board That Reflect High End Trends And Extensive Reliability.

**MISSION**

Provide Profitable Models To All Our Associates Lead The Market From Technical Front Keep On Innovating And Creating Future Interiors.

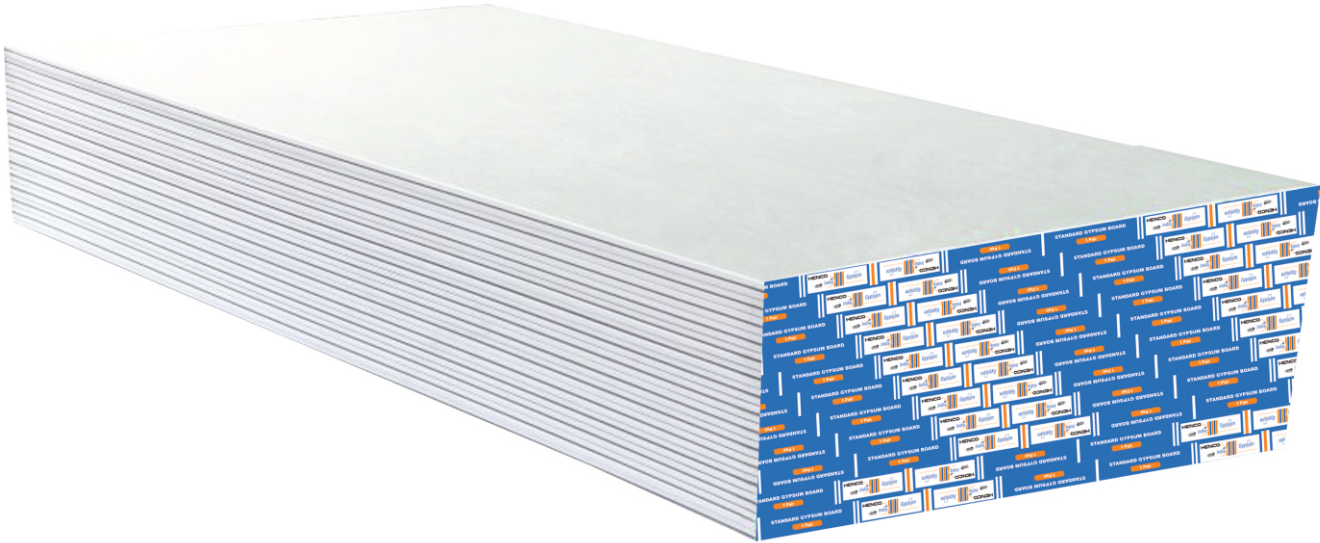



Henco india gypsum delivers exceptional execution and results in humid areas and spaces.

Length (mm)	Indian standard 1830 - GCC standard 2400 on reques: any size between 1800 - 3000
Width (mm)	Indian standard 1220 - GCC standard 1200 ask your team for special width sizes
Thickness (mm)	Standard 12.50 on reques: 7 / 8 / 9 / 9.5 / 12 / 15 / 18
Edge	Tapered: The standard convinient type on request: Suared / Beveled / round
Color	Face: Green - Back: Grey

PROPERTIES PER 12.5MM	ASTM 1396:2006 Specifications	BS EN 520:2004 Specifications
Flexural Strength (N) Longitudinal	≥ 480	≥ 550
Flexural Strength (N) Transverse	≥ 175	≥ 210
Nail Pull Resistance (N)	≥ 343	-
Core Hardness (N)	≥ 49	-
Core End Hardness (N)	≥ 49	-
Edge Hardness (N)	≥ 49	-
Thickness (mm)	± 0.40	± 0.5
Board Length (mm)	± 6.0	≥0, -5
Board Width (mm)	≥ 0, -3.0	≥0, -4
End Squareness (mm)	± 3.2	≤ 2.5
Weight (Kg/m <sup>2</sup> )	-	-
Water Absorption	≤ 5.0%	H-1, H-2, H-3
Surface Water Absorption	≤ 1.5%	-